

STATIC TORQUE SCREWDRIVER- MINI (LOW TORQUE)

TTH

Advantages :

Portable

Modular by these
different tips

Fast and Precise

Connecting to an
advanced
playback console



The TTH are a torque screwdriver range for static torque of low capacities for handheld application. It can be used independently.

They are equipped with a ¼ square drive or a 3 mm H7 bore depending on the capacities, for the fitting of adaptors.

They are the efficient option for a precise and fast data reading.

Coupled with ACRN's XA-m console or an AFTI, they provide a robust and precise measurement solution. Indeed, these consoles offer a fairly wide range of functions for reading, mode and storage of measurements.


TECHNICAL INFORMATION

Accuracy	0.5 % of the full scale
Dimensions (mm)	L 135 x D 22 (TTH 0.01 -> TTH 0.2) Length x Diameter
	L 151 x D 22 (TTH 0.5 -> TTH 1)
Deliverable	Cable for connection to a reading console Calibration certificate


OPTIONS

Reading console	AFTI	XA-m
Data processing software	Vector Pro Lite	DataExport

MODEL	TTH 0.1	TTH 0.05	TTH 0.1	TTH 0.2	TTH 0.5	TTH 1
mN.m	10	50	100	200	500	1 000
gf.cm	100	500	1 000	2 000	5 000	10 000
ozf.inch	1	7	14	28	72	144

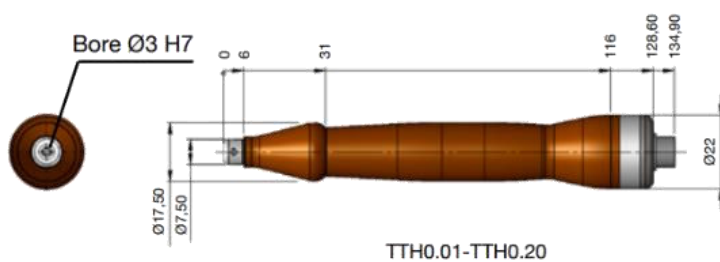

TTH0.01-TTH0.20

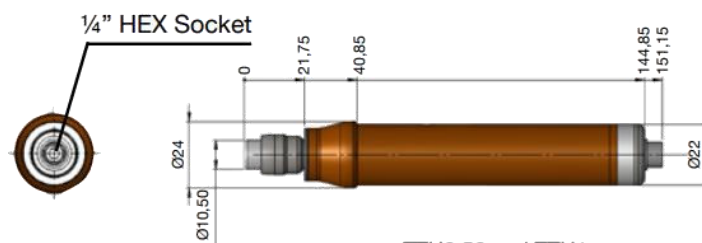

TTH0.50 and TTH1



AFTI

Measurement record

Reported overload

Different modes: peak or follower



XA-m

Storage of peak value

15 Programmes

Connection to a printer